


1. EMITTER
 2. COLLECTOR
 3. BASE

2SA AND 2SB TYPE TRANSISTORS ARE PNP,
 2SC AND 2SD TYPE ARE NPN.

NOTE SW001 COUPLING CAPACITOR IN-OUT SW. SW002 POWER SW.

VOLTAGE-REGULATORS

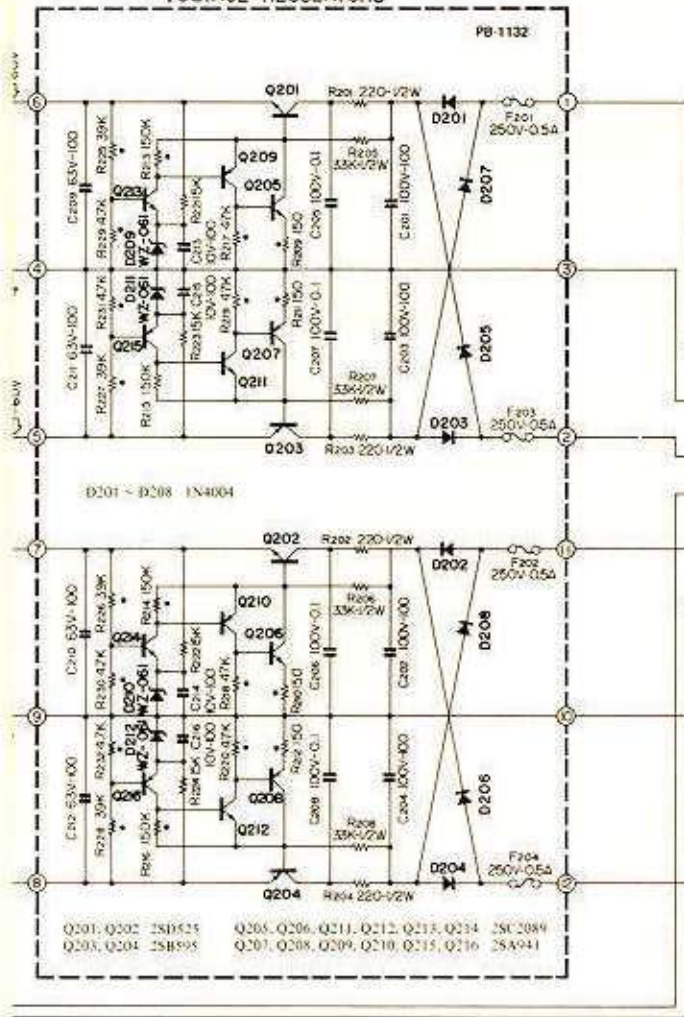

NOTE:

1. ALL RESISTORS ARE IN OHM, 1/4-WATT 5% TOLERANCE, UNLESS SPECIFIED.
2. ALL FRACTIONAL-VALUE CAPACITORS AND ELECTROLYTICS ARE IN μ F. OTHER CAPACITORS ARE IN μ F, 100V TOLERANCE.
3. TRANSISTORS AND DIODES MAY BE REPLACED WITH ANY TYPE HAVING COMPARABLE RATING.
4. DUE TO CONTINUED IMPROVEMENTS "LUX" RESERVES THE RIGHT TO ALTER THE CIRCUIT OR THE SPECIFICATION.
5. SYMBOLS
 • 1/8-WATT RESISTOR
 Δ FLAMEPROOF RESISTOR
 ⊠ MICA CAPACITOR

