


# Power Amp Assembly (717-0045-00)

## パワーアンプAss'y

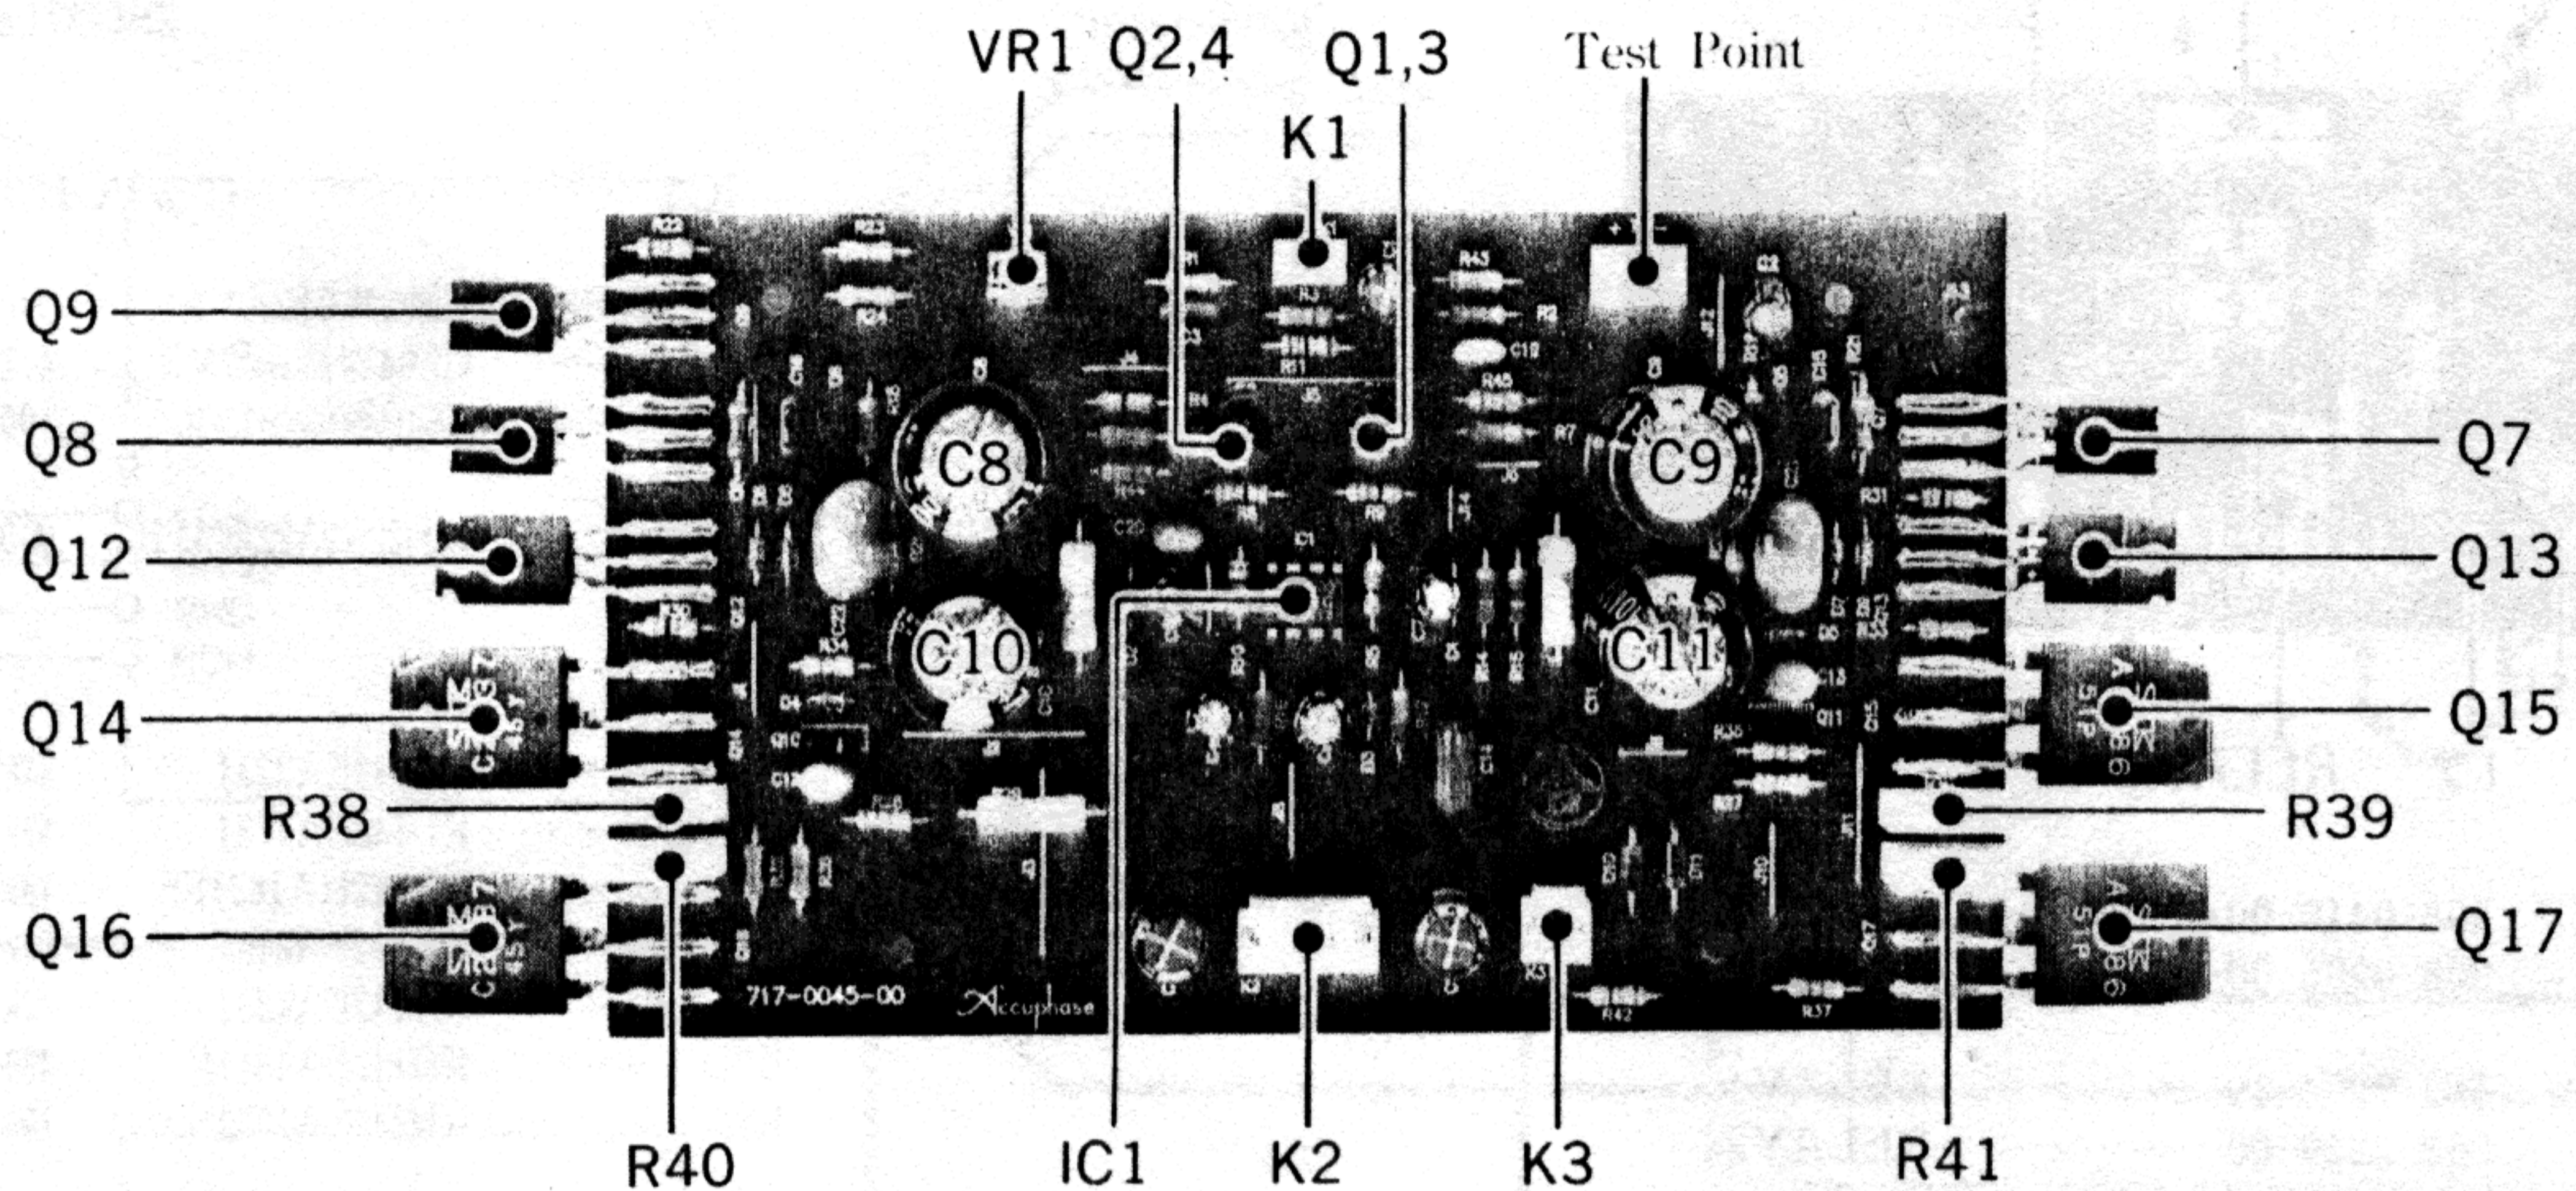

PC Board PCボード	115-0809-00							
Connector Plug コネクタプラグ	308-0306-00	.....	for K1	Electrolytic Capacitor アルミ電解コンデンサ	C1,4,5	.....	CE04W1H100VP	10 $\mu$ F 50V
	308-0411-00	.....	for K2		C2	.....	CE04W1HR47VX	0.47 $\mu$ F/16V
	308-0212-00	.....	for K3		C6,7	.....	CE04W1C470VR	47 $\mu$ F 16V
	308-0221-00	.....	for TP		C8,9	.....	CE04W2A332FA	220 $\mu$ F 100V
Terminal 端子	314-0514-04			Polyester Film Capacitor ポリエステルフィルムコンデンサ	C3	.....	CQ922M1H102J B	1000pF/50V
	583-0524-00	.....	for VR1:470 $\Omega$		Polypropylene Film Capacitor ポリプロピレンフィルムコンデンサ	C12,13	.....	CQ922N2A682JAPS
Diode ダイオード	D1,2	.....	HZ153L		C14	.....	CQ93PP2A103JM	0.01 $\mu$ F/100V
	D4,5	.....	ISS176		C19,20	.....	CQ922N2A102JAPS	1000pF/100V
	D6,7	.....	HZ9A2L		C21,22	.....	CQ922N2A104JAPS	0.1 $\mu$ F 100V
	D8,9	.....	ISS81		R1	.....	RD142EA474JF	470k $\Omega$ $\pm$ 5% 1/4W
	D10,11	.....	S5277G		R2	.....	RD142EA273JF	27k $\Omega$ $\pm$ 5% 1/4W
	D3	.....	RD8.2EW		R3	.....	RD142EA681JF	680 $\Omega$ $\pm$ 5% 1/4W
Zener Diode ツェナーダイオード	Q1,4	.....	2SC3478 K,U	Carbon Film Resistor 炭素被膜抵抗器	R4,5	.....	RD142EA303JF	30k $\Omega$ $\pm$ 5% 1/4W
	Q2,3	.....	2SA1376-K,U		R6,7	.....	RD142EA332JF	3.3k $\Omega$ $\pm$ 5% 1/4W
Transistor トランジスタ	Q5	.....	2SC2705-Y		R8,9	.....	RD142EA220JF	22 $\Omega$ $\pm$ 5% 1/4W
	Q6	.....	2SA1145-Y		R14,15	.....	RD142EA392GF	3.9k $\Omega$ $\pm$ 5% 1/4W
	Q7,9	.....	2SC3902-S,T		R16,17	.....	RD142EA513JF	51k $\Omega$ $\pm$ 5% 1/4W
	Q8	.....	2SA1507-S,T		R18,19	.....	RD142EA511JF	510 $\Omega$ $\pm$ 5% 1/4W
	Q10	.....	2SC3668-Y		R22,44,45	.....	RD142EA182JF	1.8k $\Omega$ $\pm$ 5% 1/4W
	Q11	.....	2SA1428-Y		R23	.....	RD142EA331JF	330 $\Omega$ $\pm$ 5% 1/4W
	Q14,16	.....	2SC2837-O,P,Y		R24	.....	RD142EA4R7JF	4.7 $\Omega$ $\pm$ 5% 1/4W
	Q15,17	.....	2SA1186-O,P,Y		25,26	.....	RD142HA221JFS	220 $\Omega$ $\pm$ 5% 1/2W
FET	Q12	.....	2SK213	Fuse Resistor フェーズ抵抗器	R27,28	.....	RD142EA222JF	2.2k $\Omega$ $\pm$ 5% 1/4W
	Q13	.....	2SJ76		R30,31	.....	RD142EA101JF	100 $\Omega$ $\pm$ 5% 1/4W
IC	IC1	.....	NJM4580D-D		R32,33	.....	RD142EA2R2JF	2.2 $\Omega$ $\pm$ 5% 1/4W
	C15,16	.....	CC92CH2H331J	330pF/500V	R34~37	.....	RD142EA822JF	8.2k $\Omega$ $\pm$ 5% 1/4W
Ceramic Capacitor 磁器コンデンサ					R43	.....	RD142EA183JF	18k $\Omega$ $\pm$ 5% 1/4W
					R20,21	.....	RF142EA680G-P	68 $\Omega$ $\pm$ 2% 1/4W
					R42	.....	RF142EAR47J	0.47 $\Omega$ $\pm$ 5% 1/4W
					R10	.....	RN142EK6810F	681 $\Omega$ $\pm$ 1% 1/4W
					R11	.....	RN142EK15R0F	150 $\Omega$ $\pm$ 1% 1/4W
					R12,13	.....	RS143DA332JS-P	3.3k $\Omega$ $\pm$ 5% 2W
					R29	.....	RN143DA470JS-P	47 $\Omega$ $\pm$ 5% 2W
					R38~40	.....	RW993DJR22K-H	0.22 $\Omega$ $\pm$ 5% 2W